

Title: METHOD AND APPARATUS FOR FASTENING
STEEL FRAMING BY CRIMPING

Inventor(s): Robert A. Berry et al.

Atty. Ref.: 0275Y-000626/DVB

1/15

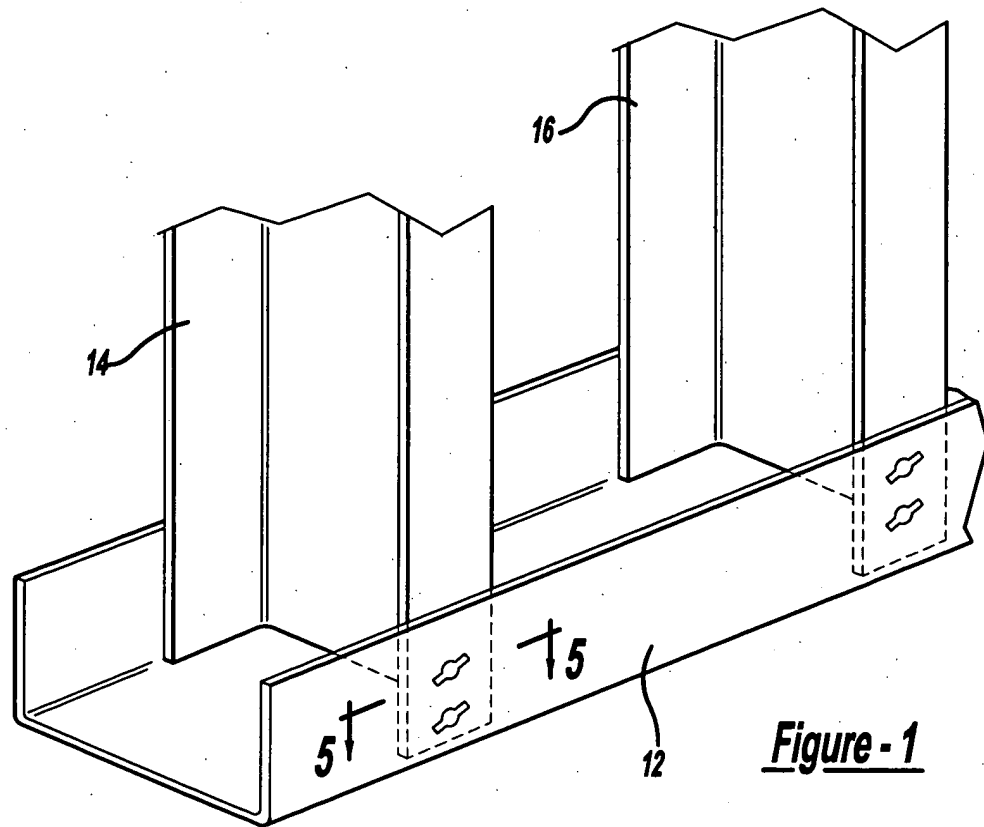


Figure - 1

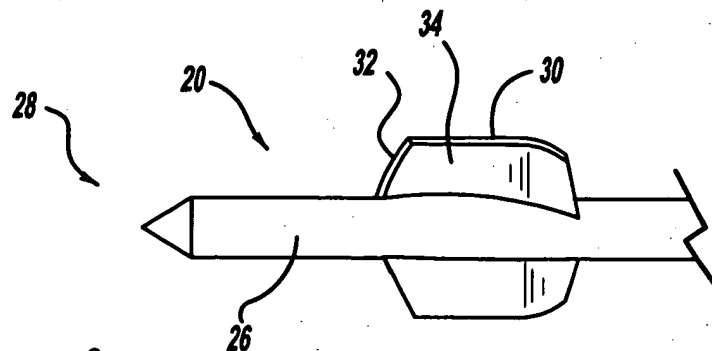





Figure - 2

Title: METHOD AND APPARATUS FOR FASTENING
STEEL FRAMING BY CRIMPING

Inventor(s): Robert A. Berry et al.

Atty. Ref.: 0275Y-000626/DVB

2/15

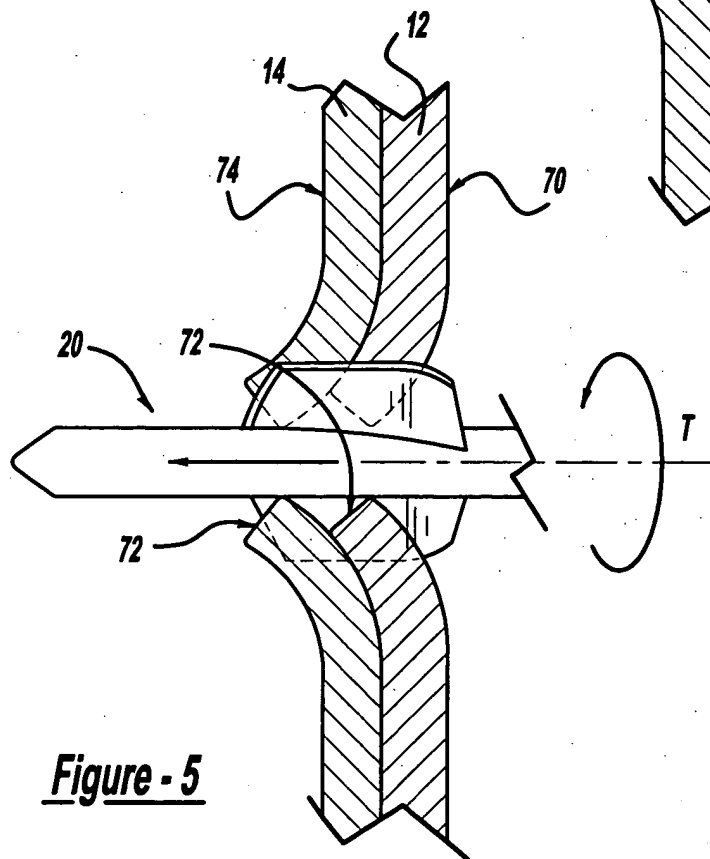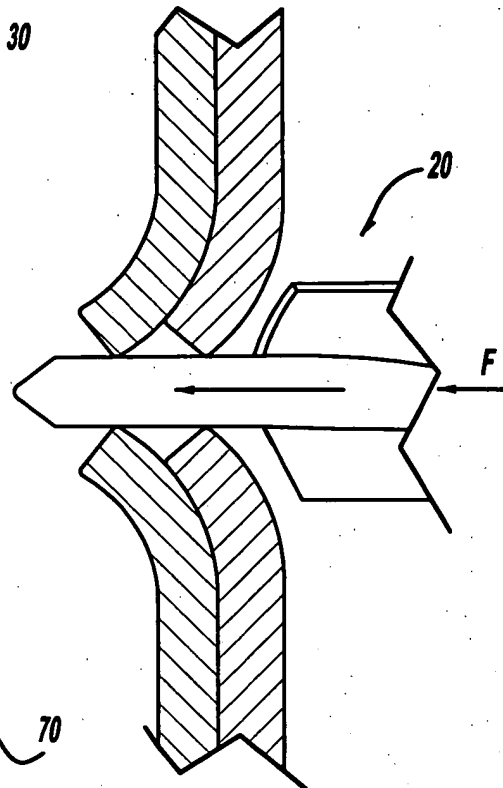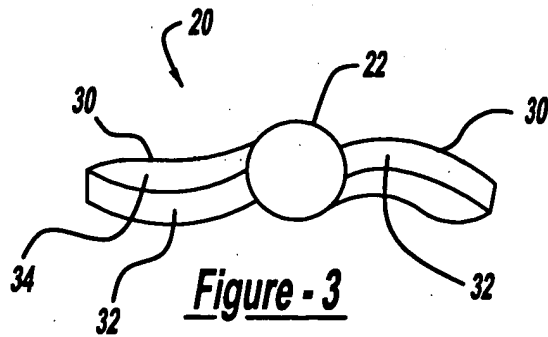

3/15

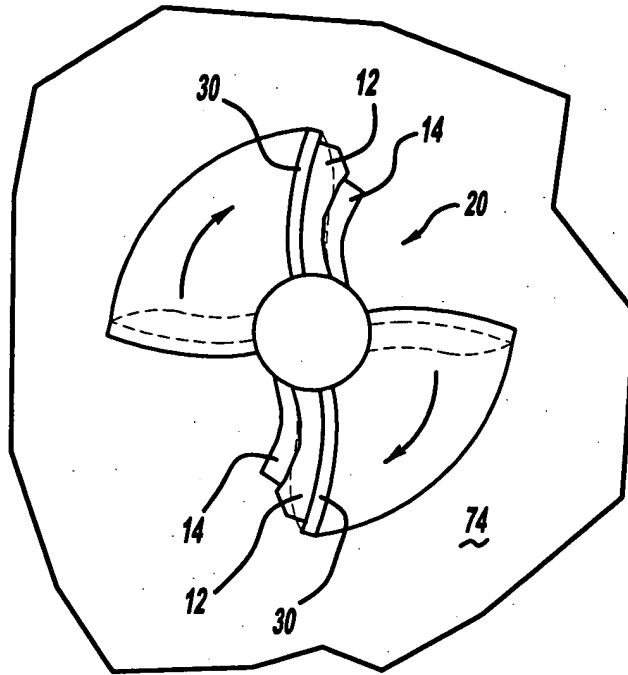


Figure - 6

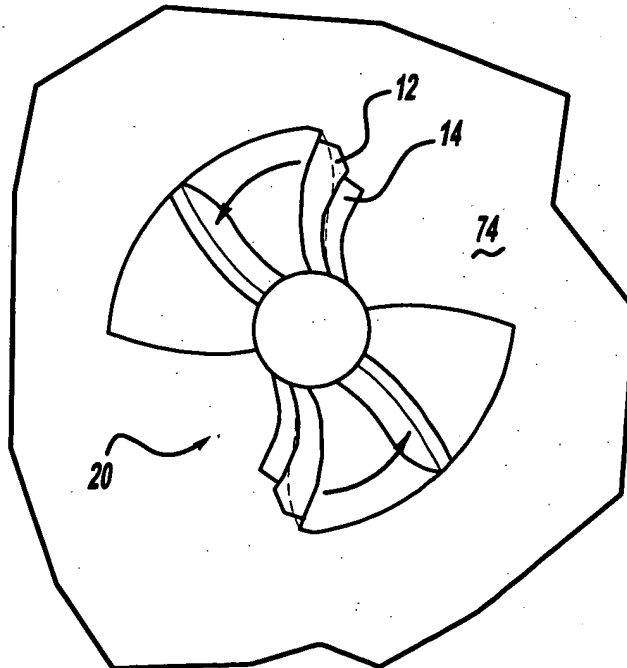


Figure - 7

4/15

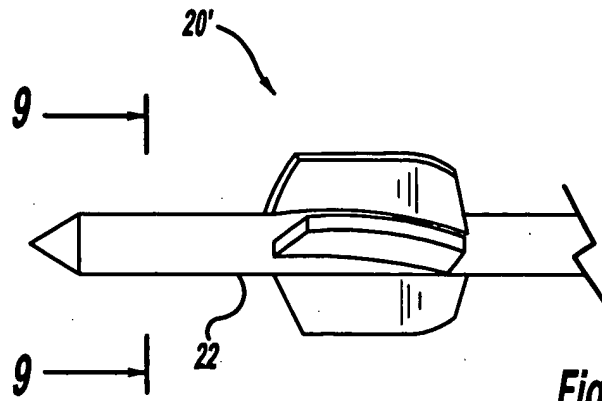


Figure - 8

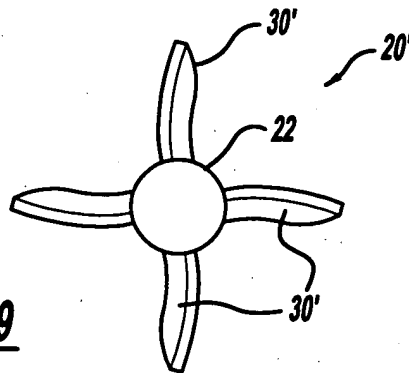


Figure - 9

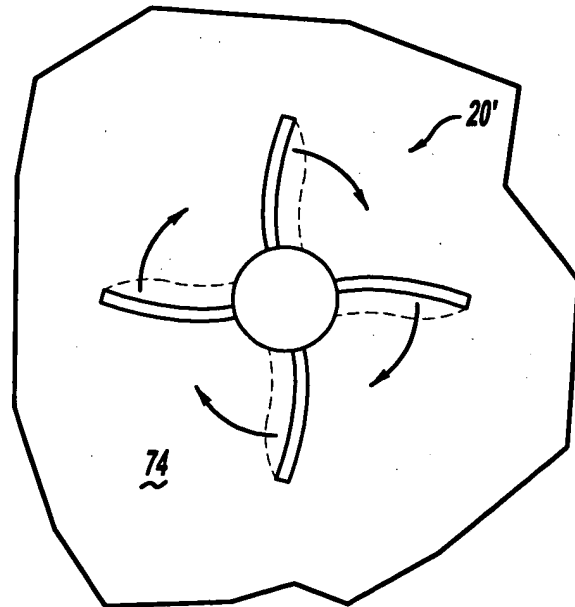


Figure - 10

Figure - 11

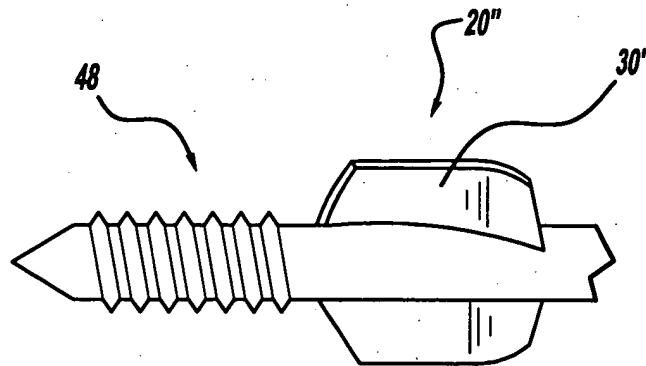
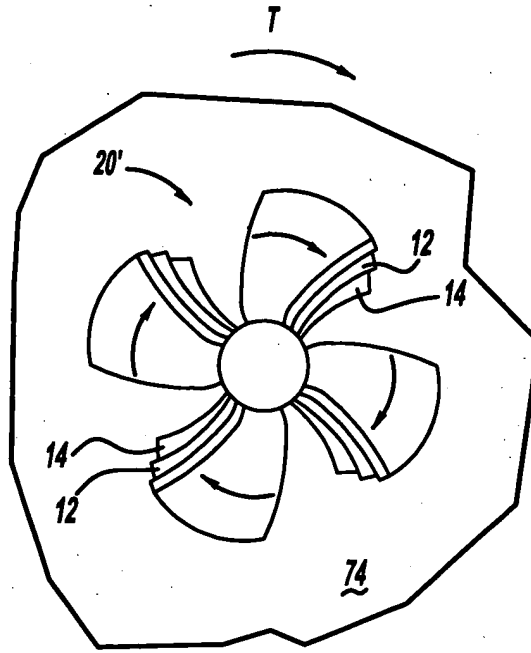


Figure - 12

Figure - 13

Title: METHOD AND APPARATUS FOR FASTENING
STEEL FRAMING BY CRIMPING

Inventor(s): Robert A. Berry et al.

Atty. Ref.: 0275Y-000626/DVB

7/15

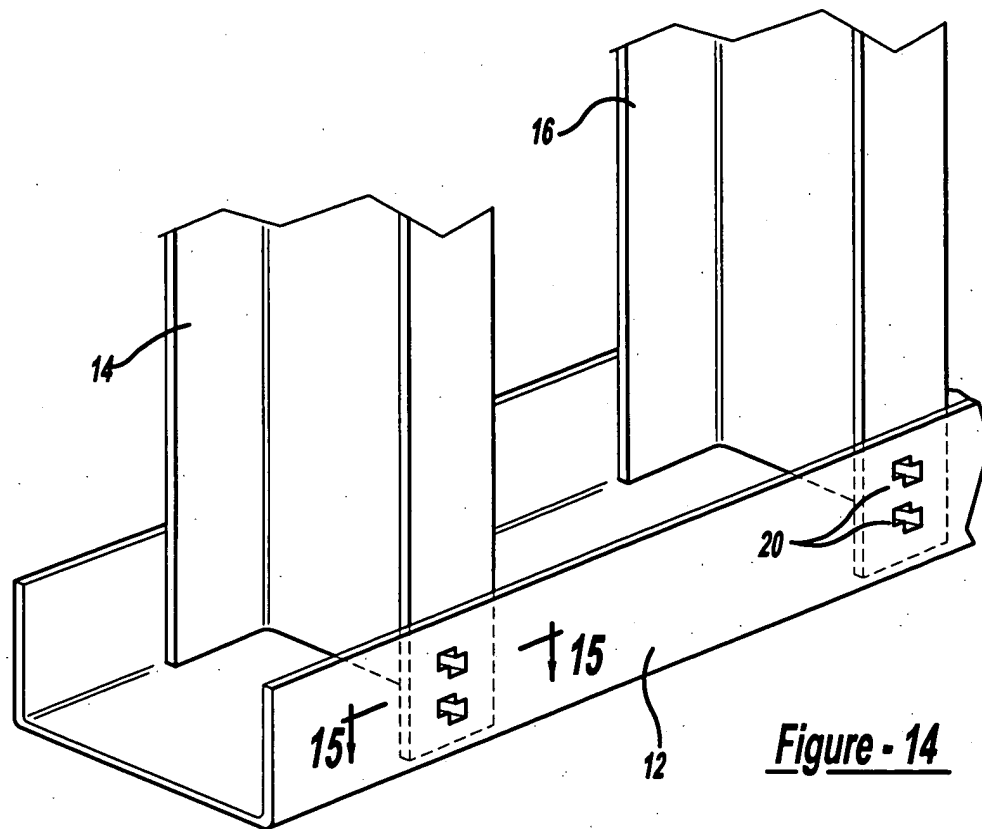


Figure - 14

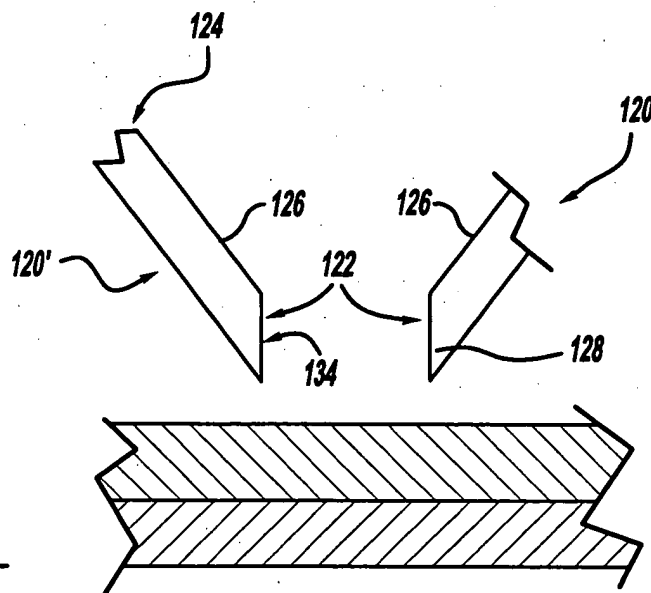


Figure - 15

Title: METHOD AND APPARATUS FOR FASTENING
STEEL FRAMING BY CRIMPING

Inventor(s): Robert A. Berry et al.

Atty. Ref.: 0275Y-000626/DVB

8/15

Figure - 16

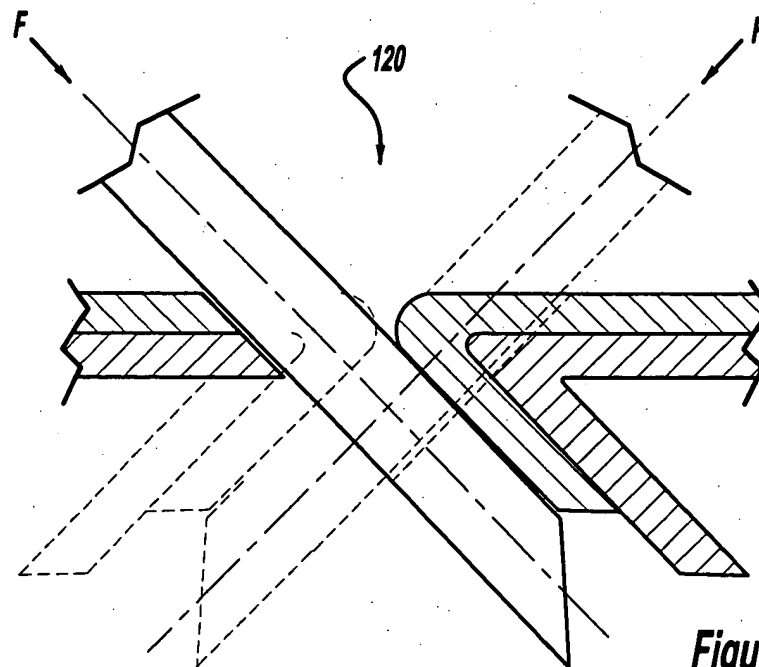
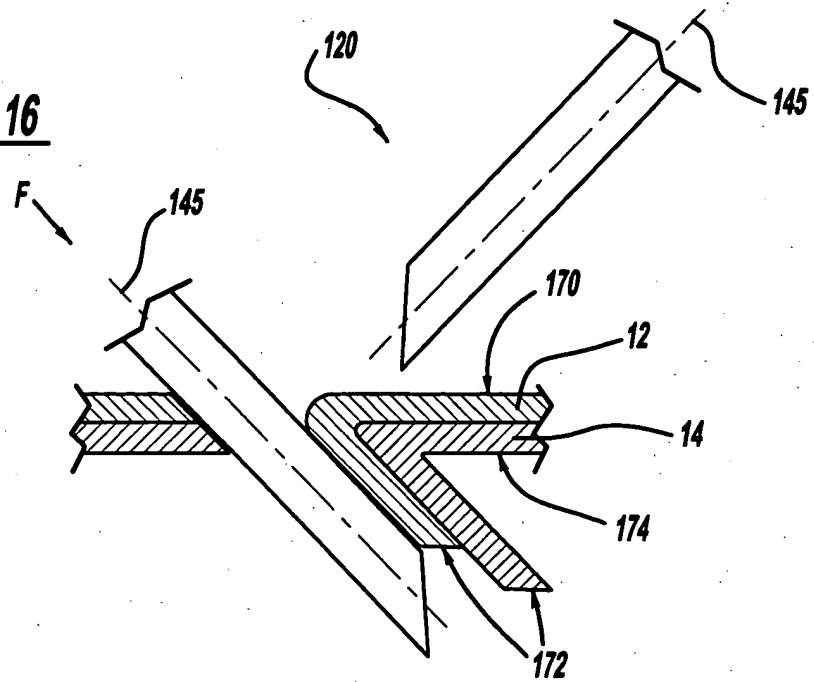


Figure - 17

9/15

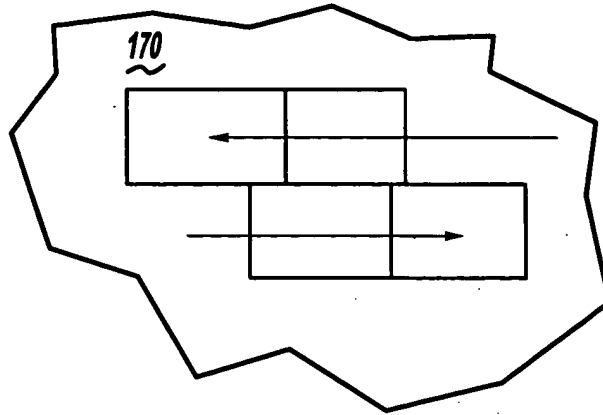


Figure - 18

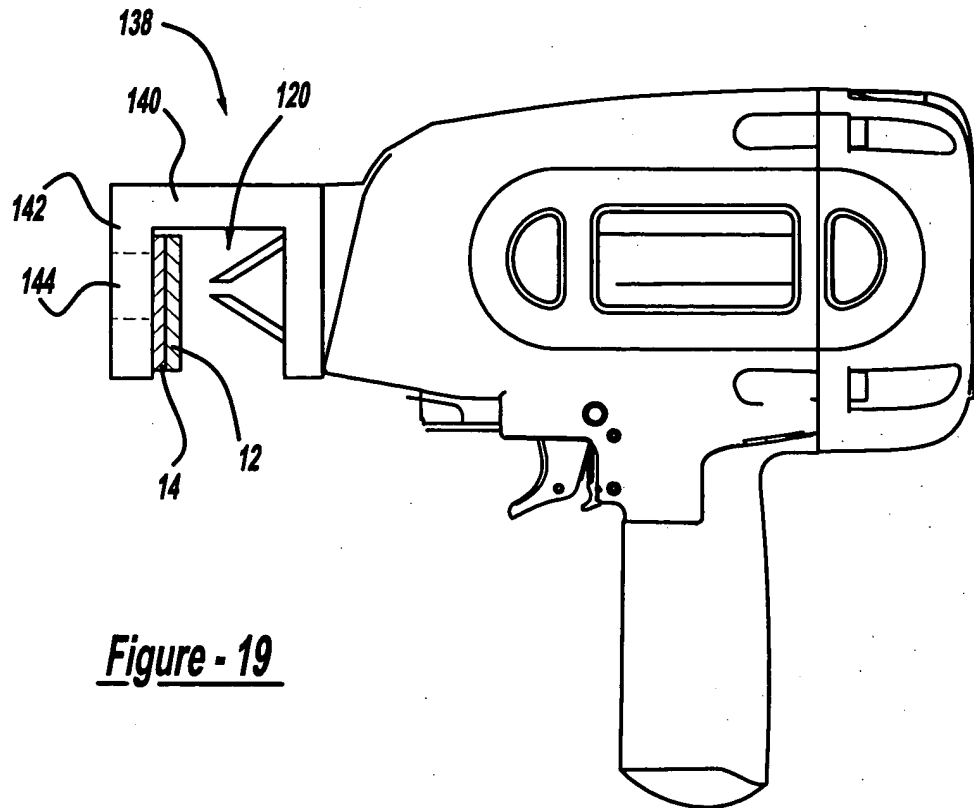


Figure - 19

Title: METHOD AND APPARATUS FOR FASTENING
STEEL FRAMING BY CRIMPING

Inventor(s): Robert A. Berry et al.

Atty. Ref.: 0275Y-000626/DVB

10/15

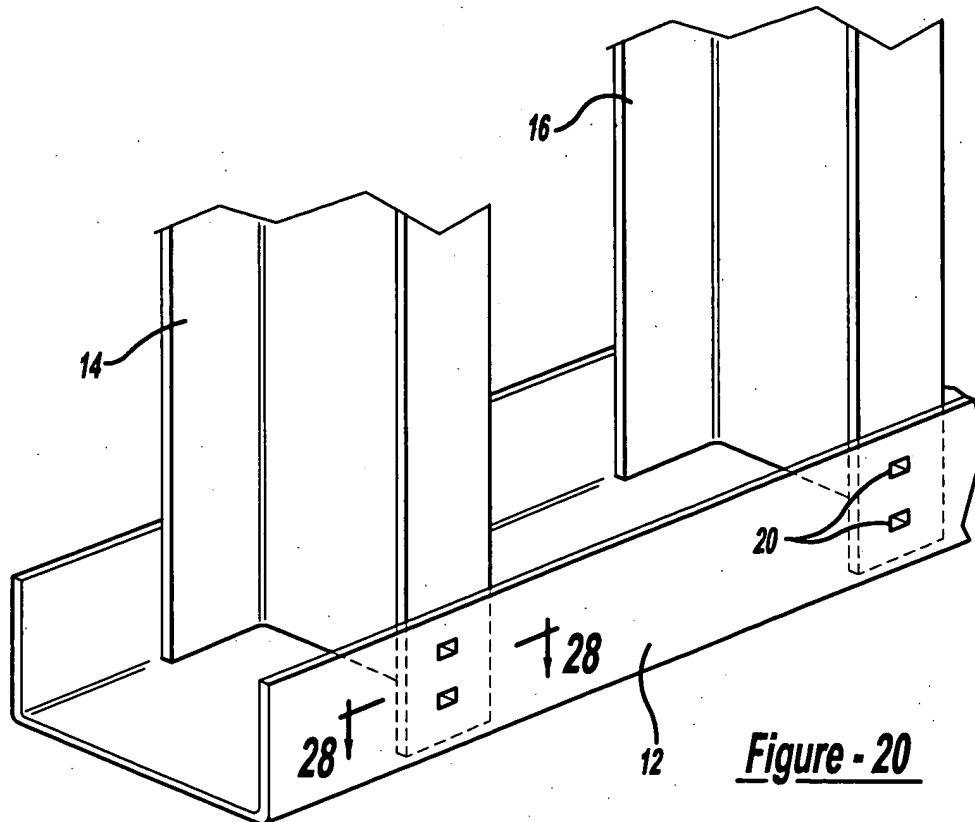


Figure - 20

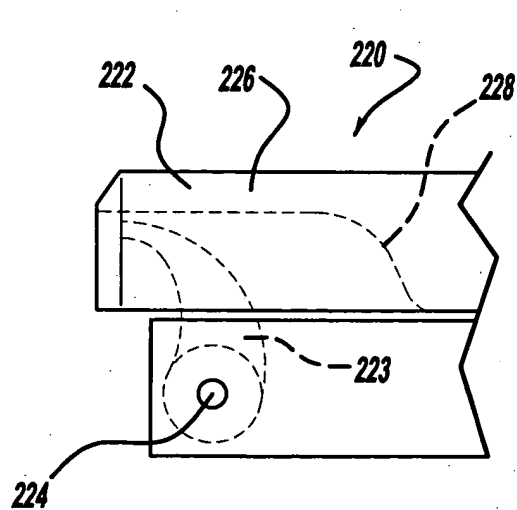


Figure - 21

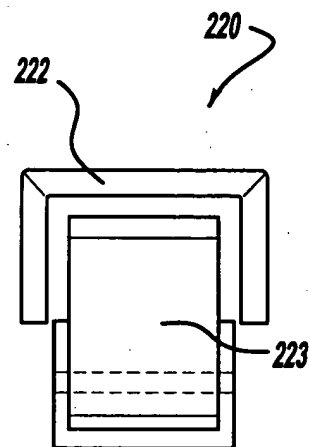


Figure - 22

FIG. 1 is a perspective view of a first embodiment of a device. The device includes a vertical, elongated, hatched component (220) and a horizontal, elongated component (22) with a circular opening (220) and a dashed line indicating a curved path.

Figure - 24

12/15

Figure - 26

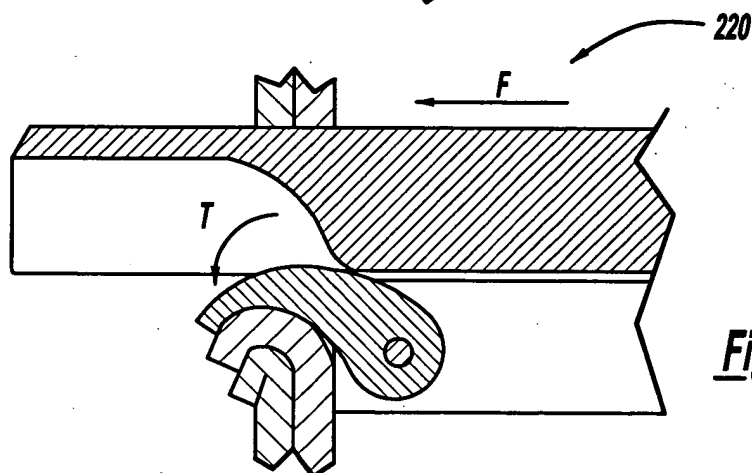
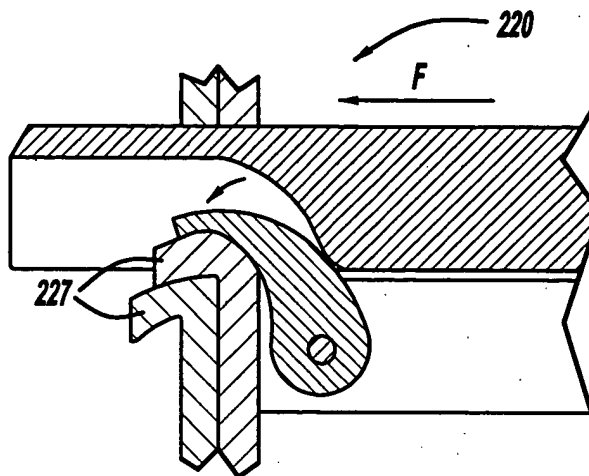
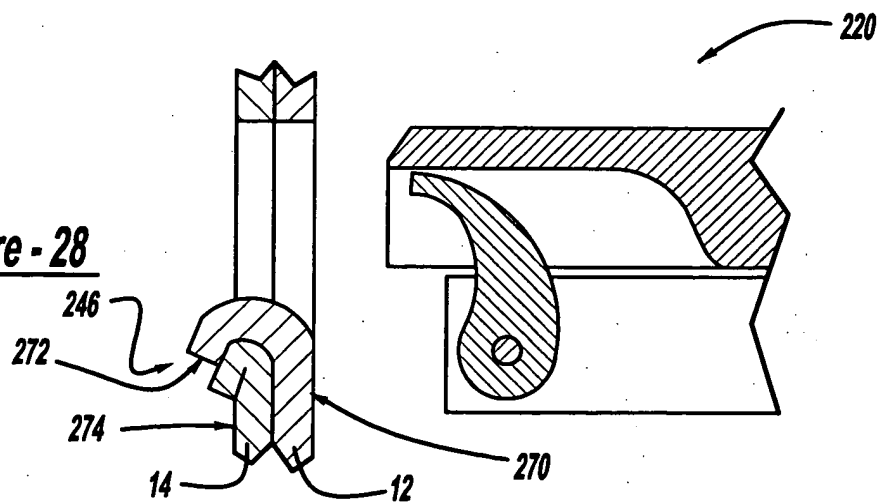
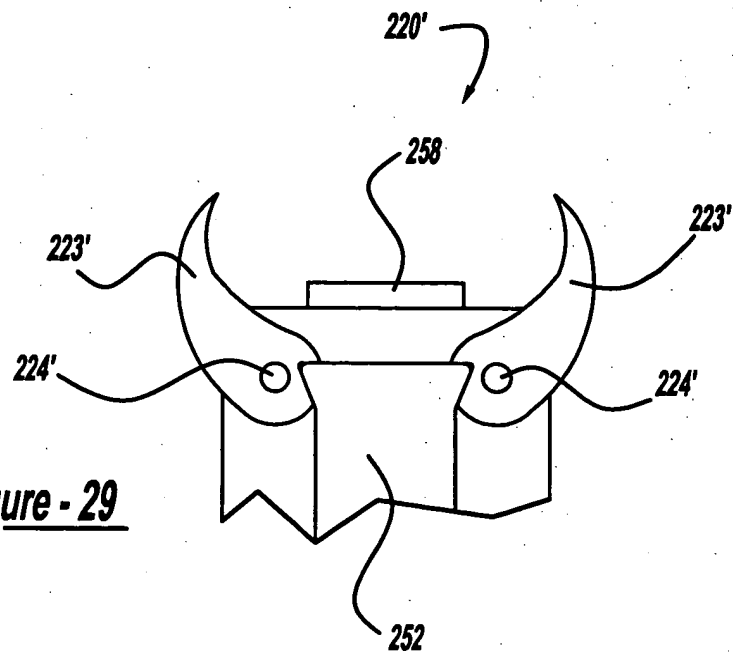


Figure - 27

Figure - 28





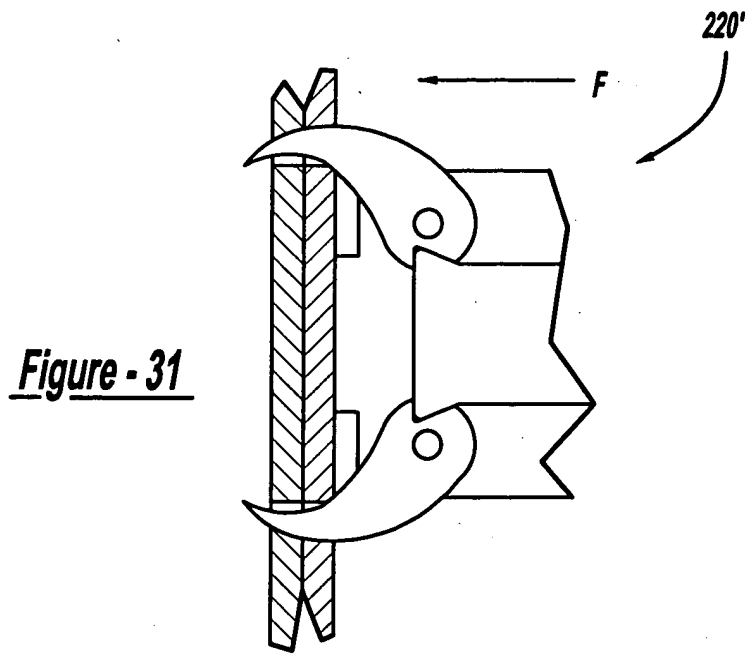
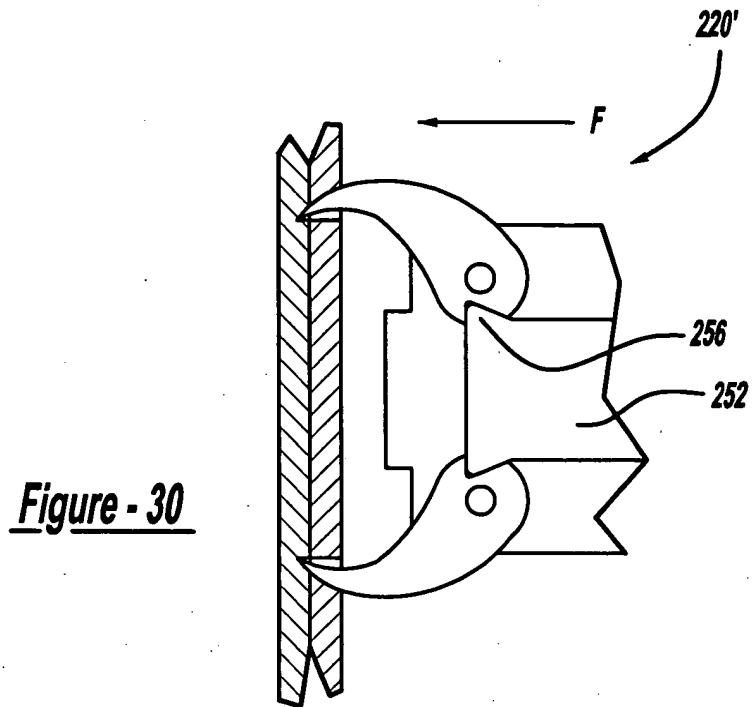


Figure - 32

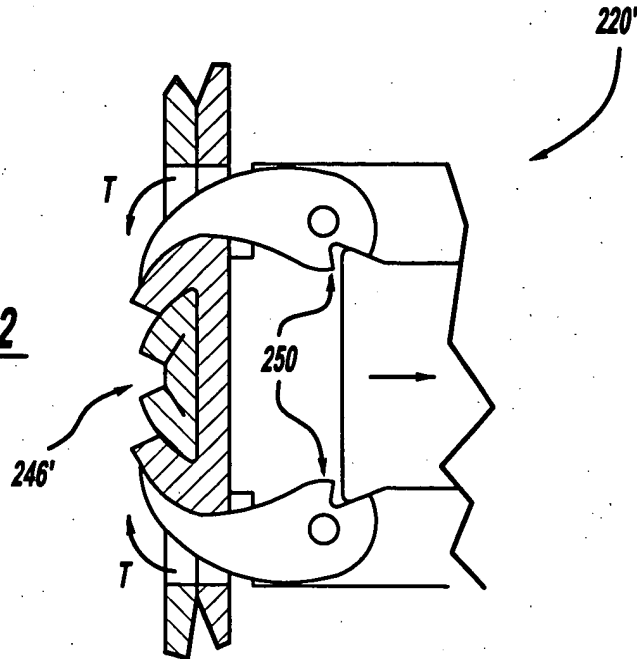


Figure - 33

